

Φ3.6x10mm, RoHS Compliant & Pb-Free  
**SLOW-BLOW MICROFUSE**  
 慢断型保险丝管

PATENT NO. 专利号: ZL 201320197259.0 ZL 201120540121.7

**INTERRUPTING CAPACITY / 分断能力:**

- 50 amperes at 125V/250V AC
- 35 amperes at 250V AC CCC
- 70 amperes at 265V AC (In practice)
- 110 amperes at 220V AC (In practice)

**TECHNICAL PARAMETERS/ 技术参数:**

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A <sup>2</sup> .Sec.) (RoHS) I <sup>2</sup> T 参考值
		CCC	TÜV	UR(cUR)	PSE	KC	
		H	H L	H L	H L	H	
25S-010H/L	1A	●	● ●	● ●	● ●	● ●	1.502
25S-012H/L	1.2A		● ●	● ●	● ●	● ●	2.592
25S-013H/L	1.25A	●	● ●	● ●	● ●	● ●	3.000
25S-015H/L	1.5A		● ●	● ●	● ●	● ●	4.225
25S-016H/L	1.6A	●	● ●	● ●	● ●	● ●	4.872
25S-020H/L	2A	●	● ●	● ●	● ●	● ●	10.15


● DENOTES FOR APPROVED      ● 表示已取得安全认证  
 H DENOTES FOR 250V          H 代表 250V  
 L DENOTES FOR 125V          L 代表 125V

**ELECTRICAL CHARACTERISTICS/ 电气特性:**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

**PACKING/ 包装:**

1. INNER BOX/ 内盒: AMMO PACK

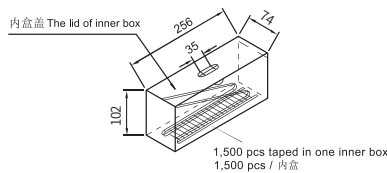


Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON  
 CARTON SIZE / 尺寸: L440x W315 x H255(mm)

**Dimensions/ 尺寸:**

Unit 单位: mm

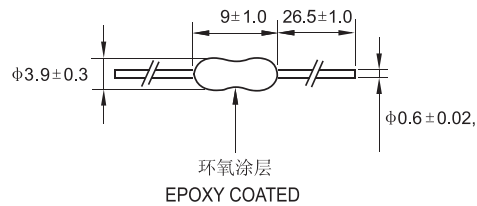

**Standards/ 标准:** UL 248-1, UL 248-14, IEC 60127-1 IEC 60127-7  
**Operating Temperature/ 工作温度:** -55°C ~125°C  
**Storing Temperature/ 储存温度:** -55°C ~85°C  
**Resistance to soldering heat/ 耐焊接热性:** 260°C, 10s Max.  
**Solderability/ 可焊性:** 245°C ±5°C, 5s±0.5s

**25S AVERAGE I-T CHARACTERISTICS CURVE  
 (FOR REFERENCE ONLY)**

**25S 平均 I-T 曲线图 (仅供参考)**

