



H0FF 32A-400A

Class of Operation: aR

保护特性: aR




Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY / 分断能力:

100,000 A at 1250V AC
50,000 A at 1000V DC

H0FF 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE)

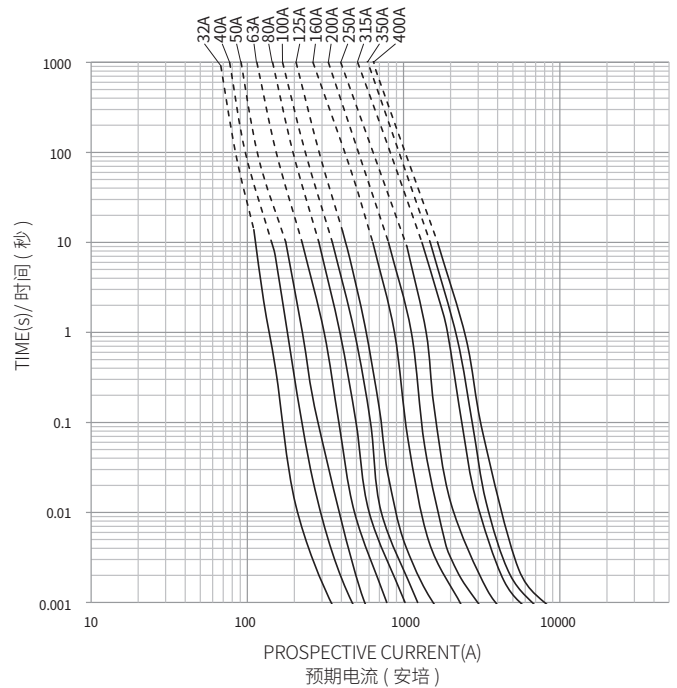

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号				SAFETY APPROVALS 安全认证				
Type-A Type center Indicator for micro	Type-C Visual Indicator	Type-D No Visual Indicator	额定电流 Rated Current	额定电压 Rated Voltage	CCC	cURus	TUV	CE
H0FF32	H0FF32C	H0FF32D	32A		●	●	●	●
H0FF40	H0FF40C	H0FF40D	40A		●	●	●	●
H0FF50	H0FF50C	H0FF50D	50A		●	●	●	●
H0FF63	H0FF63C	H0FF63D	63A		●	●	●	●
H0FF80	H0FF80C	H0FF80D	80A		●	●	●	●
H0FF100	H0FF100C	H0FF100D	100A	1250V	●	●	●	●
H0FF125	H0FF125C	H0FF125D	125A	AC	●	●	●	●
H0FF160	H0FF160C	H0FF160D	160A	1000V	●	●	●	●
H0FF200	H0FF200C	H0FF200D	200A	DC	●	●	●	●
H0FF250	H0FF250C	H0FF250D	250A		●	●	●	●
H0FF315	H0FF315C	H0FF315D	315A		●	●	●	●
H0FF350	H0FF350C	H0FF350D	350A		●	●	●	●
H0FF400	H0FF400C	H0FF400D	400A		●	●	●	●

● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING


● 表示已取得安全认证
○ 表示正在申请安全认证

PART NO. 目录编号	可选配件 Optional Accessory 微动开关 Microswitches
H0BFXXX	HMC-01

Dimensions/ 尺寸:

Unit 单位: mm


Type-D

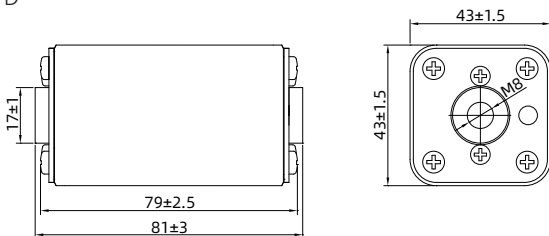

Dimensions/ 尺寸:

Unit 单位: mm

Type-A

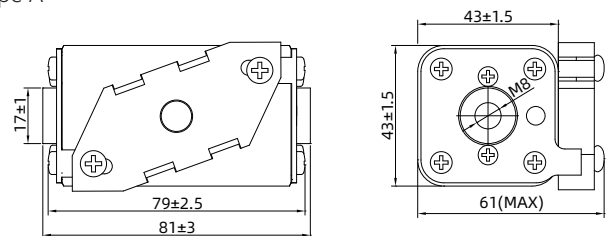

Type-C

